



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV inline valve, Series 265, DN 40 (ID 1 1/2")
Ordering No. 26532-KA42-0001

Description

Flange	ISO-KF 40
Actuator	Pneumatic, single acting with opening spring – with solenoid valve – with position indicator “open” and “closed”
Feedthrough	Bellows

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$ $< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
Pressure range		$1 \cdot 10^{-8} \text{ mbar}$ to 5 bar (abs)
Differential pressure on the plate	– In opening direction – In closing direction	$\leq 2 \text{ bar}$ $\leq 5 \text{ bar}$
Differential pressure at opening		$\leq 1 \text{ bar}$
Conductance (molecular flow)		45 ls^{-1}
Closing time		$\leq 0.2 \text{ sec.}$
Cycles until first service (Tmax 80°C, differential pressure max. 1 bar)		3 million
Admissible Temperature	– Valve body – Actuator – Solenoid valve – Position indicator	$\leq 150 \text{ °C}$ $\leq 120 \text{ °C}$ $\leq 80 \text{ °C}$ $\leq 80 \text{ °C}$
Material	– Valve body – Actuator – Plate – Bellows	Aluminum (EN AW-6060 T5) Aluminum AISI 316L (1.4404) AISI 316L (1.4404, 1.4435), AISI 316 Ti (1.4571)
Seal	– Bonnet O-ring – Plate O-ring – Actuator O-ring	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Weight		1.54 kg / 3.40 lbs
Mounting position		any
Volume of pneumatic actuator		0.035 l / 0.0012 ft ³
Compressed air min. – max. overpressure		4 – 8 bar / 58 – 116 psi
Compressed air connection		M5 female (10-32 UNF suitable)

Created by: A. Rietzler	Release date: 2013-09-10	1 of 2
Modified by:	Release date:	283090EB



VAT Vakuumventile AG
CH-9469 Haag, Schweiz


Product data sheet

HV inline valve, Series 265, DN 40 (ID 1 1/2")
Ordering No. 26532-KA42-0001

Electrical connections

Solenoid valve


Type	3/2-way
Voltage	See solenoid
Power	See solenoid
Connector	Rectangle plug, Type B (DIN standard)
Cable	Ø6 – 8 mm

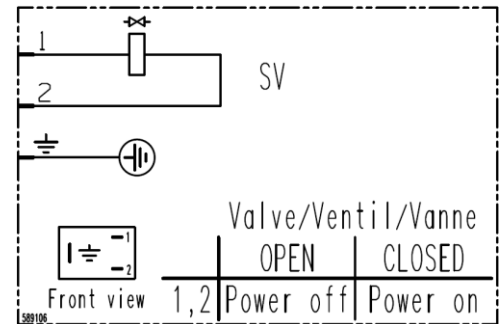

Wiring diagram

Position indicator

Type	Micro switch
Voltage	≤ 50 V AC / DC
Current	5 – 100 mA
Short circuit protected	No
Connection	Cable, 4 wires
Cable length	500 mm
Cable cross section	0.25 mm ²

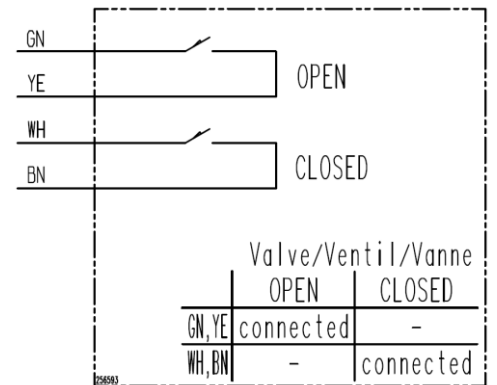

Wiring diagram